

APPLICATION

1. REFER TO APPROVED PLANS FOR LOCATION, EXTENT, AND APPLICATION DETAILS. IF THERE ARE QUESTIONS OR PROBLEMS WITH THE LOCATION, EXTENT, OR METHOD OF APPLICATION CONTACT THE ENGINEER OR RESPONSIBLE ON-SITE OFFICER FOR ASSISTANCE.
2. FILL OR SUITABLY CONTOUR ANY EXISTING RUTTING, RILLING OR GULLIES.
3. SUITABLY DIVERT UP-SLOPE STORMWATER RUNOFF AROUND TREATED AREA AS DIRECTED WITHIN THE APPROVED PLANS, OR OTHERWISE AS DIRECTED BY THE SITE ENGINEER.
4. APPLY TREATMENT TO THE AREA TO THE DEPTH AND FREQUENCY (SPACING) SPECIFIED ON THE APPROVED PLANS, OR OTHERWISE AS DIRECTED BY THE SITE ENGINEER.
5. IMMEDIATELY SEED AND MULCH ROUGHENED AREAS TO OPTIMISE SEED GERMINATION AND GROWING CONDITIONS.

MAINTENANCE

1. DURING THE CONSTRUCTION PERIOD, INSPECT THE TREATED AREA PRIOR TO FORECAST RAINFALL, DAILY DURING EXTENDED PERIODS OF RAINFALL, AFTER SIGNIFICANT RUNOFF PRODUCING RAINFALL, OR OTHERWISE ON A WEEKLY BASIS.
2. FILL EROSION RILLS SLIGHTLY ABOVE THE ORIGINAL GRADE, OR REGRADE THE SLOPE AS DIRECTED TO REMOVE THE RILLS.

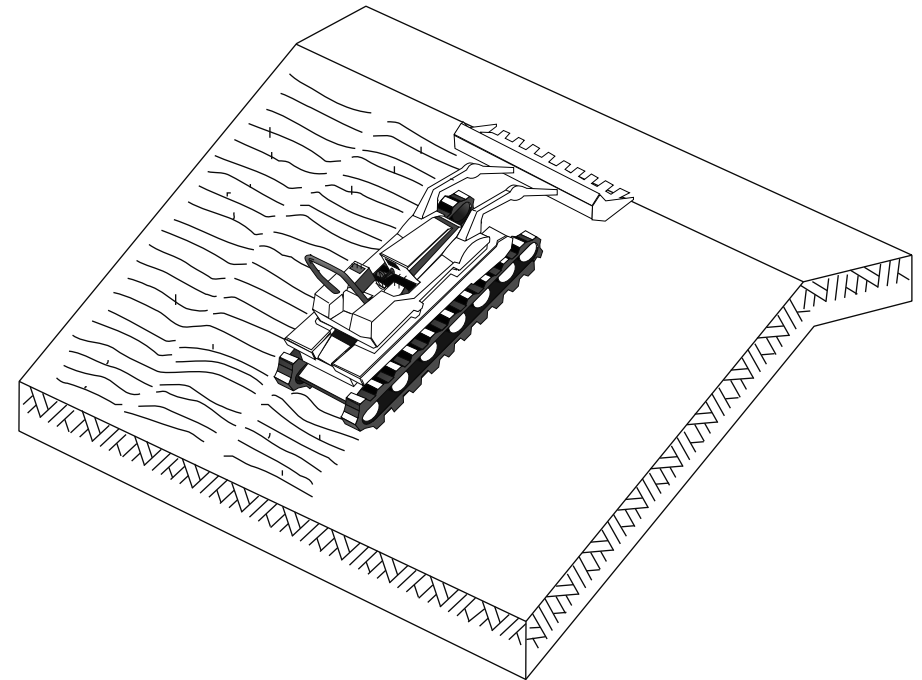


Figure 1 - Application of surface roughening on slope

Drawn:	Date:		
GMW	Dec-09	Surface Roughening	SR-01